

Insulating tent für pop-up roof Mercedes Marco Polo Mercedes Marco Polo ACTIVITY Model year 447 from 2014

Order no.:

504 839 (shipping accessories)

288 040 248 044 (accessories plus assembly)

Assembly instructions

Assembly

The insulating tent consists of two wedge-shaped side parts (2 and 3), a high front part (1) and a flat rear part (4).





The outer surface is aluminum coating.

The insulating tent is secured to the roof interior at the side parts from the inside by means of Tenax fasteners (3 on each side). To do this, the side parts should be aligned from front to rear. At the positions of the Tenax fasteners, mark two points 15 mm apart for the Tenax lower parts, each at a distance of about 10 mm from the aluminum rail. There make holes with a diameter of 4.1 mm and a maximum depth of 10 mm in the pop-up roof.

Then insert the front and rear parts and fix to the side parts by means of the Velcro strip.


CAUTION: Use a drill with a spacer!

Rivet the Tenax lower parts (5) to the blind rivets (6) in these holes. Then the insulating roof bellows can be secured to these Tenax fasteners.

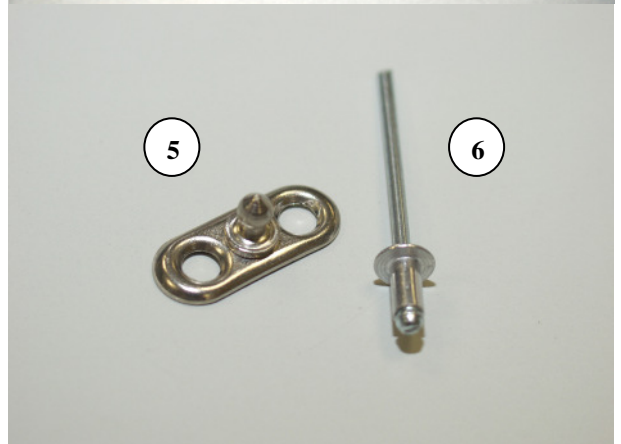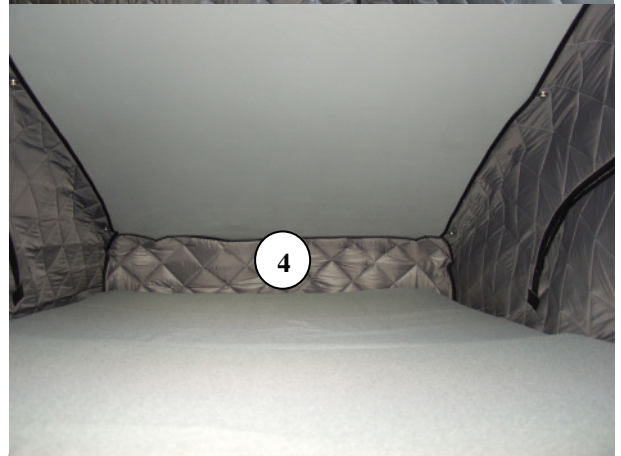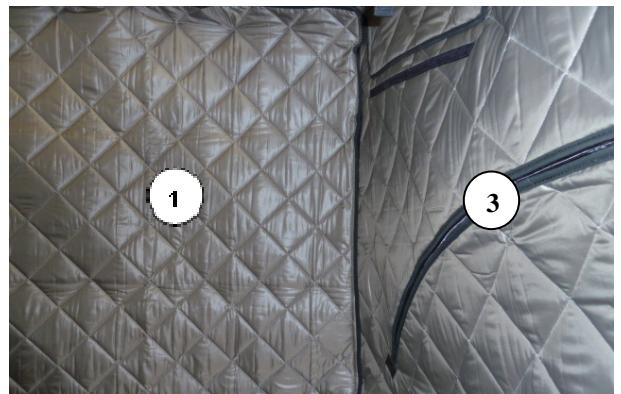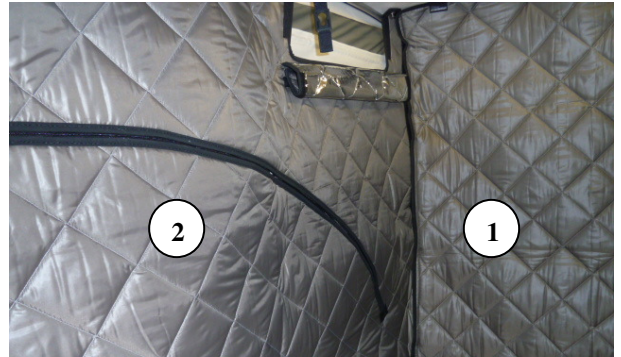

When staying in the vehicle, the forced ventilation at the top of the side parts must be opened.

CAUTION: The insulating roof tent parts must be removed before closing the pop-top roof.

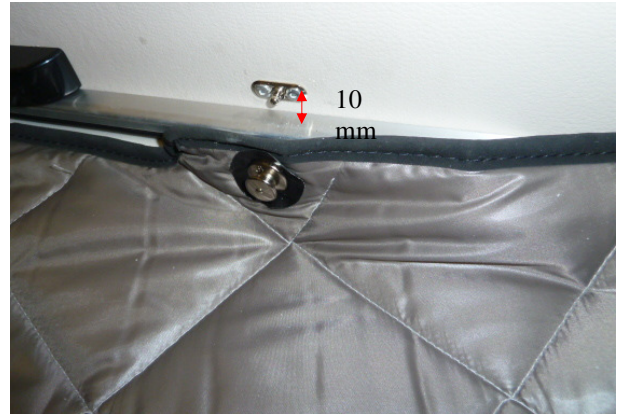

Parts list

No.	Name	Quantity
1	Front part	1
2	Side part, right	1
3	Side part, left	1
4	Rear part	1
5	Tenax lower parts	6
6	Aluminum blind rivets	12

Required tools

Caliper or ruler
Drill with spacer
Drill diameter 4.1 mm
Blind riveting tool