

## **Dining table for the GC600 & GC680**

## **Installation and Use Instructions**

## **Introduction**

This table has been specifically designed as a light weight and easy to stow alternative to the table supplied by VW for the dining area. It can be installed without the need for any permanent alterations to your VW Grand California, the process should take approximately 5 minutes.

This table is compatible with both the GC600 and the GC680.

#### **Components**

ID	Description	Image	QTY
А	Table made from 6mm HPL, including leg and mounting brackets.		1
В	Table mounting brackets	Yes Campervan	2
С	Counter sunk socket screw, M5 x 12mm	<b>4</b>	4
D	Stow lever assembly		1
Е	Foam pads (for the floor) 3mm x 25mm, 80mm		2
F	Foam pads (for the aluminium rail behind the table) 10mm x 25mm x 25mm		2

## **Installation steps**

www.YesCampervan.co.uk

- 1. Attach the table mounting brackets (B) to the underside of the table top; using the supplied Allen key to screw the counter sunk socket screws (C) through the table top and the table mounting bracket as shown in Figure 1. This is best done by loosely fitting both screws, check for alignment and then hand tighten using the Allen key.
- 2. Loosen the knurled thumb screw on the stow lever assembly (D) to retract the nylon tip bolt. Rotate the stow lever assembly into position in the aluminium tack as shown in Figure 2 and 3, then hand tighten the knurled thumb screw. It need not be overtightened; it should be just tight enough that the assembly block does not slide within the aluminium track.
- 3. The foam pads (E) should be positioned on the floor so that they protect the table mounting black brackets (B) on the table when it is stowed. Ensure that this corner of the floor is clean and dry before proceeding. Peel back the backing paper on the self adhesive foam pads (E), and push firmly into place as indicated in Figure 4.
- 4. The two foam squares (F) need to be placed in the aluminium track (Figure 5 and Figure 8) to provide two soft contact points between the table and the aluminium track, this will prevent any rattles or scrapes during transit.

#### Using the table

1. Folding out the table leg

It is advisable to put the table leg out before attaching the table to the aluminium wall rail. The table leg is locked in place with both a magnetic catch and a locking mechanism in the table leg. To undo the locking mechanism, hold the leg near to where it attaches to the table and slide it laterally in the direction indicated with an arrow on the leg (Figure 6), then fold the leg out perpendicular to the table. The table leg will lock out in the upright position (perpendicular to the table top).

2. Attaching the table to the wall

To attach the table to aluminium rail, present the table mounting brackets (B) to the aluminium rail with the opposite end of the table pointing up towards the top of the sliding door as shown in Figure 7

3. Stowing the table

Remove the table from the aluminium wall rail by lifting the tip of the table up, and gently pulling the table away from the aluminium rail. This is essentially the reverse of step 2 above, as shown in Figure 7.

Stand the table vertically with the table mounting brackets resting on the foam pads (E), the tip of the table pointing upwards and the table leg facing out as shown in Figure 8. First tuck the right-hand edge of the table behind the B pillar then rotate the stow lever to the horizontal position to hold the left-hand edge of the table in position.



Caution – always stow the table securely before driving. If passengers are using the rear seats stow the table using the straps on the bed as described by Volkswagen.

#### Installation complete.

We hope you enjoy your new table for a long time. If you encounter any difficulties, please do not hesitate to contact us for advice and support:

On our web page: www.YesCampervan.co.uk by e-mail: hello@YesCampervan.co.uk

On Facebook: https://www.facebook.com/Yes-Campervan-106344454480912

# Figures 1-8

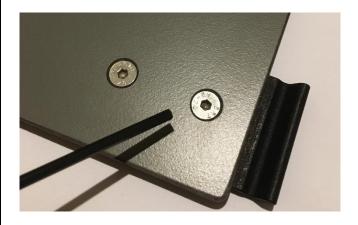


Figure 1

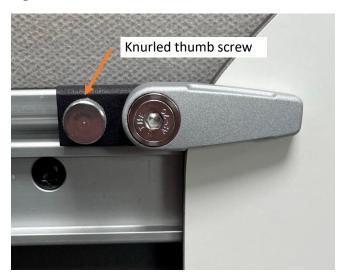




Figure 2 Figure 3

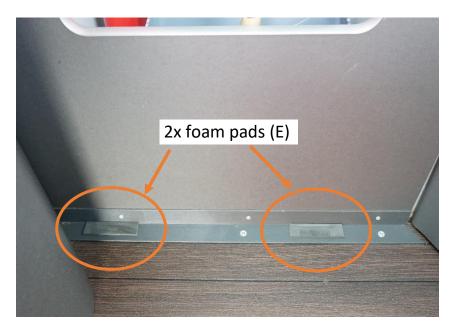


Figure 4







Figure 6



Figure 7

2x square foam pads (G) behind the table



Figure 8.